

**MARBLE
LOOK**

USAGE

-  FLOOR
-  WALL
-  COUNTERTOP
-  SHOWER FLOOR
-  EXTERIOR FLOOR

-  STEPWISE™

-  TRU-EDGE™

-  MADE IN THE U.S.A.

-  LARGE FORMAT

-  MOSAIC/DECO

-  ENCAUSTIC

-  TERRAZZO

-  PAVER

-  CUSTOMIZE

-  FLEXFIT™

-  PG

LOW HIGH


SEE CHARTS FOR FULL
PRODUCT DETAILS

SIZES:

-  12 x 24 Floor Tile
-  24 x 24 Floor Tile

FINISHES: POLISHED

PORCELAIN FLOOR TILE

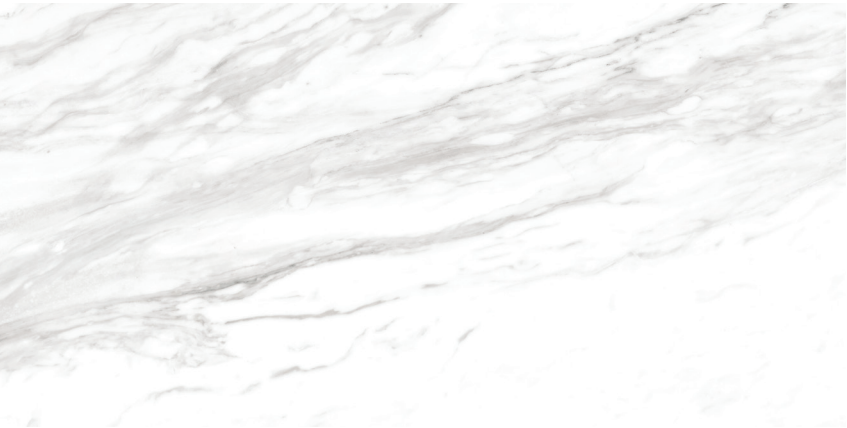

EDITORIAL VOLAKAS AT30



STUDIO CARRARA AT31



GALLERY PEARL AT32



WATERPROOF



STAINPROOF



DENTPROOF



FIRE-RESISTANT





CLIMATEPRO™



SIMPLICLEAN™

SIZES

			Thickness	Sq. Ft./ Carton	Pieces/ Carton
	12 x 24 Floor Tile	(11-5/8" x 23-3/8") (29.56 cm x 59.44 cm)	5/16"	17.01	9
	24 x 24 Floor Tile	(23-3/8" x 23-3/8") (59.44 cm x 59.44 cm)	5/16"	15.20	4

APPLICATIONS


	Target DCOF wet	Suitable
Dry & Level – Interior Floor	N/A	✓
Wet & Level – Interior Floor	≥ 0.42	
Shower Floors (Residential or Light Commercial)	≥ 0.42	
Exterior Floor Applications (including pool decking & other wet areas with minimal footwear)	≥ 0.60	
Ramps & Inclines	≥ 0.65	
Walls/Backsplashes	N/A	✓
Countertops	N/A	
Pool Linings	N/A	

A DCOF value of ≥0.42 is the standard for tiles specified for level interior spaces expected to be walked upon when wet, as stated in ANSI A137.1-A326.3. For more information about DCOF and the DCOF AcuTest™, visit daltile.com/DCOF.


APPLICATION NOTES:

Suitable for exterior applications in freezing and non-freezing climates, when proper installation methods are followed.

TRIM

Type	Number	Size	Pieces/ Carton
 Floor Bullnose	P-43F9	3 x 24	10

INSTALLATION

Grout Joint Recommendation	Shade Variation
Floor: 1/8" (3/16" when multiple sizes are installed in a modular pattern, and/or when installing tile with a length 15" or greater in a staggered brick-joint pattern; overlap should not exceed 33%).	 High (V3)

PERFORMANCE CHARACTERISTICS

	ASTM#	Result
Water Absorption	C373	< 0.5%
Breaking Strength	C648	> 275 lbs
Scratch Hardness	MOHS	7.0
Chemical Resistance	C650	Resistant

For additional information on test results, visit us at: daltile.com/information/TestResults.

DURABILITY

Floor Surface Wear Resistance		
1	Residential Bathrooms (3)	All Residential / Light Commercial
2	All Residential Areas	4 All Residential / Commercial

NOTES

Since there are variations in all fired ceramic and natural products, tile and trim supplied for your particular installation may not match samples. Final confirmation should be made from actual tiles and trim prior to installation. Manufactured in accordance with ANSI A137.1 standards.

Not for use on ramps. Water, oil, grease, improper drainage and certain footwear can create slippery conditions. Floor applications expected to be exposed to these conditions require extra caution in product selection.

For additional information refer to "Factors to Consider" at: daltile.com/Factors.

Special consideration needs to be given when installing tiles greater than 15 inches. Please refer to daltile.com/LargeTiles for more information.

Manufacturer Advisory: All tile is measured by the DCOF AcuTest™ method. Tiles with DCOF values <0.42 are not recommended for use in areas with wet or slippery conditions. For more information, see ANSI standard A137.1 section 6.2.2.1.10, available at www.tileusa.com.

Use of a latex modified thin-set is recommended for installation. For more information, visit daltile.com.



All or select items within this series meet the requirements for these qualifications. For more information, visit daltile.com.


PERPETUO™

COLORBODY™ AND GLAZED PORCELAIN FLOOR & GLAZED CERAMIC WALL TILE AND MOSAIC

MARBLE LOOK


Although Artsy is only offered in larger tiles, Daltile suggests pairing with these smaller mosaics for floor and accent tiles.

1-1/2" GLAZED CERAMIC HEXAGON MOSAIC



TIMELESS
WHITE PT20

SIZES

			Thickness	Sq. Ft./ Carton	Pieces/ Carton
	1-1/2" Hexagon Mosaic **◆ (Dot-mounted)	11-5/8" x 10-1/4" Sheet (29.53 cm x 26.04 cm Sheet)	1/4"	9.72	12

- * Available in Polished and Matte finishes only.
- ** Available in Matte finish only.
- *** Available in PT20, PT21, PT22 and PT23 only. Available in Satin finish only.
- ◆ Pressed tile, does not feature TruEdge™ Technology.

APPLICATIONS

	Target DCOF wet	Suitable
Dry & Level – Interior Floor	N/A	✓†
Wet & Level – Interior Floor	≥ 0.42	✓†*
Shower Floors (Residential or Commercial)	≥ 0.42	✓**
Shower Floors - Linear Drain	≥ 0.60	
Exterior Floor Applications (including patios, pool decking & other wet areas with minimal footwear)	≥ 0.60	
Ramps & Inclines	≥ 0.65	
Walls/Backsplashes	N/A	✓
Countertops	N/A	✓†
Pool Linings	N/A	✓**

A DCOF value of ≥0.42 is the standard for tiles specified for level interior spaces expected to be walked upon when wet, as stated in ANSI A137.1-A326.3. For more information about DCOF and the DCOF AcuTest™, visit daltile.com/DCOF.

APPLICATION NOTES:

Floor tile suitable for exterior applications (provided it is noted as suitable in the applications chart above) in freezing and non-freezing climates, when proper installation methods are followed.

Wall and mosaic tile suitable for exterior applications (provided it is noted as suitable in the applications chart above) in non-freezing climates, when proper installation methods are followed.

† Floor and Mosaic tile only. * Matte finish only. ** Mosaic tile only.

 POST-CONSUMER
RECYCLED MATERIALS

 PRE-CONSUMER
RECYCLED MATERIALS



 MADE IN THE U.S.A.

 REVEAL IMAGING®

All or select items within this series meet the requirements for these qualifications.
For more information, visit daltile.com.




TRIM

	Type	Number	Size	Pieces/Carton
	Floor Bullnose*	P43F9	3 x 24	10
	Jolly**	S1/212J	1/2 x 12	12

- * Available in Polished and Matte finishes only
- ** Available in PT20, PT21, PT22 and PT23 only. Available in Satin finish only.

INSTALLATION

Grout Joint Recommendation	Shade Variation
Floor: 1/8" (3/16" when multiple sizes are installed in a modular pattern, and/or when installing tile with a length 15" or greater in a staggered brick-joint pattern; overlap should not exceed 33%.)	
12 x 24 Wall: 1/16" (1/8" when rectangular size is installed in a staggered brick-joint pattern; overlap should not exceed 33%.)	 Random (V4)
4 x 12 Wall: 1/16" (When rectangular size is installed in a staggered brick-joint pattern, overlap should not exceed 33%.)	

Mosaic: 1/8"

PERFORMANCE CHARACTERISTICS

	ASTM#	Floor Result	Wall Result	Mosaic Result
Water Absorption	C373	< 0.5%	< 20.0%	< 3.0%
Breaking Strength	C648	> 275 lbs	120-230 lbs	> 250 lbs
Scratch Hardness	MOHS	8.0 (Matte) 6.0 (Polished)	4.0 - 6.0	8.0
Chemical Resistance	C650	Resistant	Resistant	Resistant

For additional information on test results, visit us at: daltile.com/information/TestResults.

DURABILITY

Floor Surface Wear Resistance			
1	Residential Bathrooms	3	All Residential / Light Commercial
2	All Residential Areas	④	All Residential / Commercial

NOTES

Since there are variations in all fired ceramic and natural products, tile and trim supplied for your particular installation may not match samples. Final confirmation should be made from actual tiles and trim prior to installation. Manufactured in accordance with ANSI A137.1 standards.

Not for use on ramps. Water, oil, grease, improper drainage and certain footwear can create slippery conditions. Floor applications expected to be exposed to these conditions require extra caution in product selection.

For additional information refer to "Factors to Consider" at: daltile.com/Factors.

Random visuals enhance the natural beauty of this product. To achieve optimal results, all tile should be selected from multiple cartons and shading and graphic arrangement planned prior to installation.

Special consideration needs to be given when installing tiles greater than 15 inches. Please refer to daltile.com/LargeTiles for more information.

Manufacturer Advisory: All tile is measured by the DCOF AcuTest™ method. Tiles with DCOF values <0.42 are not recommended for use in areas with wet or slippery conditions. For more information, see ANSI standard A137.1 section 6.2.2.1.10, available at www.tileusa.com.

Special care should be taken when grouting with dark pigmented colors. A grout release is recommended to prevent finely powdered pigments from lodging in the pores of the surface. Use of a latex modified thin-set is recommended for installation.

7834 C.F. Hawn Freeway,
Dallas, Texas 75217 | 1.800.933.TILE

To view the complete collection of
Daltile® products and information,
visit our website at daltile.com.



©2024 Daltile (7/24)


CORE FUNDAMENTALS™ – PLATINUM

GLAZED PORCELAIN FLOOR AND GLAZED CERAMIC WALL & MOSAICS

MARBLE LOOK


FINISHES: MATTE

2 x 2 MOSAIC



CALACATTA EMPIRE CT76

AVAILABLE TILE SIZES



2 x 2
Mosaic

Although Artsy is only offered in larger tiles, Daltile suggests pairing with these smaller mosaics for floor and accent tiles.

CORE FUNDAMENTALS™ – PLATINUM

GLAZED PORCELAIN FLOOR, WALL & MOSAICS

CONCRETE LOOK


FINISHES: MATTE

2 x 2 MOSAIC



WHITE UB02

AVAILABLE TILE SIZES



2 x 2
Mosaic

PLATINUM: CT75, CT76 | PH60, PH61, PH62, PH63 | UB02, UB04

APPLICATIONS	Target DCOF wet	Suitable
Dry & Level – Interior Floor	N/A	✓**
Wet & Level – Interior Floor	≥ 0.42	✓**
Shower Floor – Standard Center Drain	≥ 0.42	✓*
Shower Floor – Linear Drain	≥ 0.42	✓*
Exterior Floor Applications (including patios, pool decking & other wet areas with minimal footwear)	≥ 0.60	
Ramps & Inclines	≥ 0.65	
Walls/Backsplashes	N/A	✓
Countertops	N/A	✓**
Pool Linings	N/A	✓*


A DCOF value of ≥0.42 is the standard for tiles specified for level interior spaces expected to be walked upon when wet, as stated in ANSI A137.1-A326.3. For more information about DCOF and the DCOF AcuTest™, visit daltile.com/DCOF.



APPLICATION NOTES:

Suitable for exterior applications (provided it is noted as suitable in the applications chart above) in freezing and non-freezing climates, when proper installation methods are followed.

** Wall tile not suitable for this application

* Mosaic tile only

MOSAICS	SIZES	THICKNESS
	2 x 2 Mosaic Dot-mounted	(12" x 24" Sheet) (30.48 cm x 60.96 cm Sheet) 1/4"

INSTALLATION	
Grout Joint Recommendation	Shade Variation
<p>Floor: 3/16" (Overlap should not exceed 33% when installing tile with a length 15" or greater in a staggered brick-joint pattern.)</p> <p>Wall: 1/16" (1/8" when rectangular size is installed in a staggered brick-joint pattern; overlap should not exceed 33%.)</p> <p>Mosaic: 1/8"</p>	<div><div></div><div>Medium (V2) PH60, PH61, PH62 & PH63</div></div> <div><div></div><div>High (V3) CT75, CT76, UB02 & UB04</div></div>

PERFORMANCE CHARACTERISTICS				
	ASTM#	Floor Result	Wall Result	Mosaic Result
Water Absorption	C373	< 0.5%	< 20.0%	< 3.0%
Breaking Strength	C648	> 275 lbs	120-230 lbs	> 250 lbs
Scratch Hardness	MOHS	8.0	4.0-6.0	8.0
Chemical Resistance	C650	Resistant	Resistant	Resistant

For additional information on test results, visit us at: daltile.com/information/TestResults.

DURABILITY
Floor Surface Wear Resistance
1 Residential Bathrooms 3 All Residential / Light Commercial
2 All Residential Areas ④ All Residential / Commercial